

SGT-70BX

Standby Power (kVA)	70
Standby Power (kW)	56
Prime Power (kVA)	63,2
Prime Power (kW)	51
Power Factor (cos phi)	0,8


Standby Current (A)	101
Prime Current (A)	91
Nominal Voltage (V)	400/231
Engine Speed (r.p.m)	1500
Phase	3

Engine Specifications

Engine Brand	BAŞAK
Engine Model	409100TAG
Standby Power (Kw/hp)	67,2/91,4
Engine Speed (r.p.m)	1500
Total Displacement (L)	3,456
Cylinder Arrangement	4-L
Bore x Stroke (mm x mm)	100 x 110
Compretn Ratio	18,0:1
Governor Type	Mechanical
Aspiration System	Turbocharged AAC
Injection	Direct
Cooling System	Water Cooled
Electrical System (VDC)	12
Oil Capacity (L)	10,5
Coolant Capacity (L)	15
Fuel Tank Capacity (L)	180
Maximum Exhaust Gas Temperature (°C)	560
Maximum Exhaust Gas Flow (m3/h)	684
Maximum Back Pressure (kPa)	10
Cooling Air Flow (m3/min)	72
Fuel Consumption at 50 % (L/h)	8,4
Fuel Consumption at 75 % (L/h)	12,2
Fuel Consumption at 100 % (L/h)	15,8
Cylinder Liner Type	Dry Type
Air Filter Type	Dry Type-Replacable
Radiator	Tropical type up to 50 °C

Alternator Specifications

Alternator Brand	Lynx
Alternator Model	LX 224 F
Frequency (Hz)	50
Nominal Power (kVA)	75
Nominal Voltage (V)	400
Phase	3
Regulated By	AVR
Voltage Regulation	± 1 %
Short Circuit Current	100% In
Insulation	Class H
IP Class	IP 23
Power Factor	0.8
Efficiency (%)	90
THD	<1.5%
Connection Type	Star connection
Number of Wires	12
Poles	4 pole
Bearing Type	Single Bearing

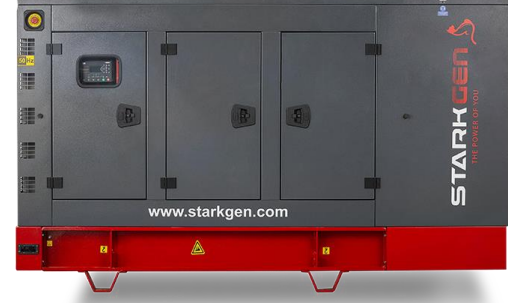

Open Type Dimensions and Weight

Width (mm)	1100
Length (mm)	2000
Height (mm)	1500
Weight (Kg)	1026
Fuel Tank Capacity (L)	180

Starkgen reserves the right to introduce changes to models and features without prior notice

Canopy Type Dimensions and Weight

Width (mm)	1100
Length (mm)	2850
Height (mm)	1805
Weight (Kg)	1400
Fuel Tank Capacity (L)	180



STARKGEN JENERATÖR PAZARLAMA ve TİC. AŞ

Center Office
Hürriyet mah. Yakacık D100 Kuzey Yanyol
No49/1 34876 Kartal - İstanbul, Türkiye
T. +90 216 453 0404

Factory
Hanlı Sakarya Mah. Başak Sk. No 56/1
Arifiye - Sakarya, Türkiye
T. +90 264 295 8300

