

SGT-572PL6

Standby Power (kVA)	570
Standby Power (kW)	456
Prime Power (kVA)	513
Prime Power (kW)	410,4
Power Factor (cos phi)	0,8

Standby Current (A)	867
Prime Current (A)	780
Nominal Voltage (V)	380/220
Engine Speed (r.p.m)	1800
Phase	3

Engine Specifications

Engine Brand	PERKINS
Engine Model	2506A-E15TAG2
Standby Power (Kw/hp)	514/689
Engine Speed (r.p.m)	1800
Total Displacement (L)	15,2
Cylinder Arrangement	6-L
Bore x Stroke (mm x mm)	137 x 171
Comprection Ratio	0,667361111
Governor Type	Electronic
Aspiration System	Turbocharged AAC
Injection	Direct
Cooling System	Water Cooled
Electrical System (VDC)	24
Oil Capacity (L)	62
Coolant Capacity (L)	58
Fuel Tank Capacity (L)	680
Maximum Exhaust Gas Temperature (°C)	550
Maximum Exhaust Gas Flow (m3/h)	6318
Maximum Back Pressure (kPa)	6,8
Cooling Air Flow (m3/min)	866
Fuel Consumption at 50 % (L/h)	53
Fuel Consumption at 75 % (L/h)	78
Fuel Consumption at 100 % (L/h)	102
Cylinder Liner Type	Wet Type-Replacable
Air Filter Type	Dry Type-Replacable
Radiator	Tropical type up to 50 °C

Alternator Specifications

Alternator Brand	Leroy Somer
Alternator Model	TAL0473C
Frequency (Hz)	60
Nominal Power (kVA)	520
Nominal Voltage (V)	380
Phase	3
Regulated By	AVR
Voltage Regulation	± 0.8 %
Short Circuit Current	100% In
Insulation	Class H
IP Class	IP 23
Power Factor	0.8
Efficiency (%)	94,5
THD	< 1.5 %
Connection Type	Star connection
Number of Wires	6
Poles	4 pole
Bearing Type	Single Bearing




Open Type Dimensions and Weight

Width (mm)	1500
Length (mm)	3300
Height (mm)	2150
Weight (Kg)	3624
Fuel Tank Capacity (L)	680

Starkgen reserves the right to introduce changes to models and features without prior notice

Canopy Type Dimensions and Weight

Width (mm)	1500
Length (mm)	4600
Height (mm)	2904
Weight (Kg)	4324
Fuel Tank Capacity (L)	680

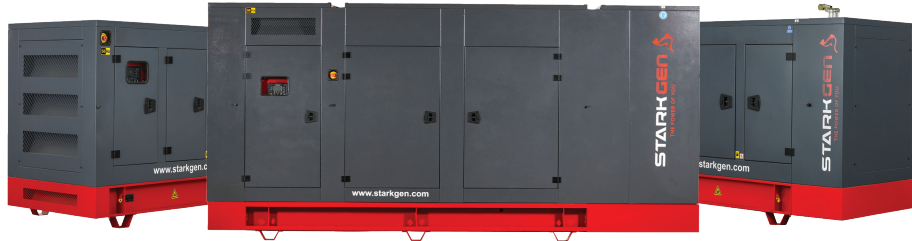

STARKGEN JENERATÖR PAZARLAMA ve TİC. AŞ

Center Office

Hürriyet mah. Yakacık D100 Kuzey Yanyol
No49/1 34876 Kartal - İstanbul, Türkiye
T. +90 216 453 0404

Factory

Hanlı Sakarya Mah. Başak Sk. No 56/1
Arifiye - Sakarya, Türkiye
T. +90 264 295 8300

