

SGT-75PW6

Standby Power (kVA)	71,2
Standby Power (kW)	56,96
Prime Power (kVA)	64,5
Prime Power (kW)	51,6
Power Factor (cos phi)	0,8

Standby Current (A)	108
Prime Current (A)	98
Nominal Voltage (V)	380/220
Engine Speed (r.p.m)	1800
Phase	3

Engine Specifications

Engine Brand	PERKINS
Engine Model	1103A-33TG2
Standby Power (Kw/hp)	69,6 /93,33
Engine Speed (r.p.m)	1800
Total Displacement (L)	3,3
Cylinder Arrangement	3-L
Bore x Stroke (mm x mm)	105 x 127
Comprection Ratio	17,25:1
Governor Type	Electronic
Aspiration System	Turbocharged
Injection	Direct
Cooling System	Water Cooled
Electrical System (VDC)	12
Oil Capacity (L)	8,3
Coolant Capacity (L)	10,2
Fuel Tank Capacity (L)	180
Maximum Exhaust Gas Temperature (°C)	564
Maximum Exhaust Gas Flow (m3/h)	750
Maximum Back Pressure (kPa)	10
Cooling Air Flow (m3/min)	111
Fuel Consumption at 50 % (L/h)	8,8
Fuel Consumption at 75 % (L/h)	12,5
Fuel Consumption at 100 % (L/h)	16,6
Cylinder Liner Type	Wet Type-Replacable
Air Filter Type	Dry Type-Replacable
Radiator	Tropical type up to 50 °C

Alternator Specifications

Alternator Brand	WEG
Alternator Model	201AIHE
Frequency (Hz)	60
Nominal Power (kVA)	80
Nominal Voltage (V)	380
Phase	3
Regulated By	AVR
Voltage Regulation	± 0,5%
Short Circuit Current	300% In
Insulation	Class H
IP Class	IP 23
Power Factor	0.8
Efficiency (%)	84,3
THD	<3%
Connection Type	Star connection
Number of Wires	12
Poles	4 pole
Bearing Type	Single Bearing




Open Type Dimensions and Weight

Width (mm)	1100
Length (mm)	1750
Height (mm)	1555
Weight (Kg)	940
Fuel Tank Capacity (L)	180

Canopy Type Dimensions and Weight

Width (mm)	1100
Length (mm)	2400
Height (mm)	1805
Weight (Kg)	1320
Fuel Tank Capacity (L)	180

Starkgen reserves the right to introduce changes to models and features without prior notice

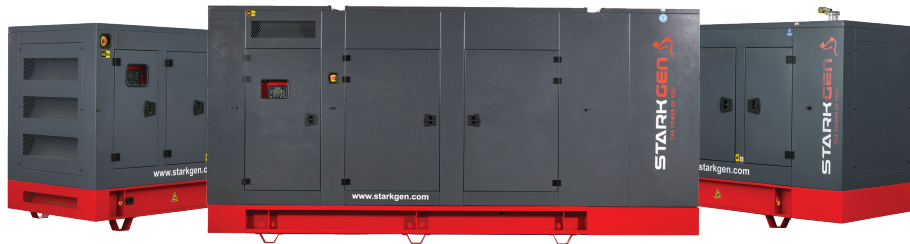

STARKGEN JENERATÖR PAZARLAMA ve TİC. AŞ

Center Office

Hürriyet mah. Yakacık D100 Kuzey Yanyol
No49/1 34876 Kartal - İstanbul, Türkiye
T. +90 216 453 0404

Factory

Hanlı Sakarya Mah. Başak Sk. No 56/1
Arifiye - Sakarya, Türkiye
T. +90 264 295 8300

